

# *Mega\_Link 2*

*Secure AES-256 Encrypted  
Telemetry Communication System*



*Brochure Iss 1.0 02/10/23*

Churchill Controls Ltd  
Unit 30 Wellington Business Park, Dukes Ride, Crowthorne, Berkshire, RG45 6LS  
Tel: +44 (0)1344 750233 Fax: +44 (0)1344 752304  
e-mail: [sales@churchill-controls.co.uk](mailto:sales@churchill-controls.co.uk)

## Overview

**Mega\_Link2** is a versatile and secure telemetry communication system for passing two-way instrumentation, measurement and control data between industrial plant and equipment distributed over wide geographical areas and remote locations. Using a variety of communications media, including: de-regulated unlicensed UHF low power radio or the national mobile networks it removes the dependency for cables. It builds upon the success of the previous generation of the Mega\_Link family with a proven track record and installed base within major utility companies over the past 10 years.

**Mega\_Link2** offers secure telemetry transmission with all messages encrypted using the **AES-256** data encryption standard in response to the UK implementing the NIS Directive through the Network and Information Systems Regulations (2018). The NIS Regulations apply to operators of essential services and Relevant Digital Service Providers (RDSPs). It offers cost effective, secure, robust and dependable performance, making it the ideal solution for your telemetry and control applications.

### COM Ports

- **COM1 and COM2** can be fitted with a combination of the following communication interface modules:
  - 458 MHz unlicensed UHF low power radio - option of class 1 receiver
  - 869 MHz unlicensed UHF low power radio
  - 4G LTE modem
  - V23 modem for private wire
  - R232 Serial I/F for external modem (e.g. ADSL, Satellite etc.)
- **COM3** is serial RS232 or RS485 interface:
  - Fieldbus interface to PLC/SCADA systems using Modbus RTU (master or slave)
  - Communications interface for external modem (e.g. ADSL, Satellite etc.)
- **COM4** is 10/100M Ethernet for IP communications;
  - LAN/WAN TCP/IP local or remote MQTT Broker (Amazon Web Services) across the internet
- **COM5** is USB Host interface for logging to memory card or external modem
- **COM6** is USB Device interface for configuration and diagnostics using DCD2 software

### Security Features

- **AES-256** Encryption for all COMs interfaces
- TLS v1.2 for MQTT Amazon Web Services

### Telemetry Interfaces

- I/O interfaces are compatible with a wide range of digital & analogue instruments and equipment such as volt-free contacts, depth transducers, flow meters and electrical switchgear:
  - 8 Digital Inputs (volt-free contact)
  - 8 Digital Outputs (relay contact)
  - 2 Analogue Inputs (fully isolated, 0...20mA), with a regulated 12Vdc transducer supply
  - 2 Analogue Outputs (0...20mA)
- I/O interfaces are expandable to add a further 256 physical inputs and outputs for larger system applications, using a range of expansion modules
- Power supply:
  - Internal 110/240Vac mains supply (with battery backup)
  - 12Vdc or 24Vdc
- DIN rail mounted for fitment in existing equipment racks or Churchill Controls can supply **Mega\_Link2** along with expansion modules ready built into a range of standard IP67 enclosures for quick and easy installation

### Churchill Controls Ltd

Unit 30 Wellington Business Park, Dukes Ride, Crowthorne, Berkshire, RG45 6LS

Tel: +44 (0)1344 750233 Fax: +44 (0)1344 752304

e-mail: [sales@churchill-controls.co.uk](mailto:sales@churchill-controls.co.uk)

## Advanced Features


- AES-256 cryptographic encryption for all COMs interfaces
- Space for 2<sup>nd</sup> interface module to give Dual Comms operation for applications requiring extra resilience
- RS232/RS485 port for interface to PLC and SCADA equipment using industry standard fieldbus protocols
- Digital and analogue exception reporting for alerting change of conditions past pre-determined thresholds
- Outstations can also be configured to operate in a repeater mode to relay two-way radio communications over extended distances and overcome otherwise challenging geographical features and locations
- Versatile and user configurable; communications failure, battery condition and RSSI monitoring functions
- Built-in colour LCD display and joystick user interface for easy monitoring of status and operation
- USB programming port for connection to Windows based PC or tablet running GUI software for setting up system configurations, data routing tables, detailed status monitoring and diagnostics etc.

## Application Examples


- Basestation and Outstation system



- Basestation and Multiple Outstation system

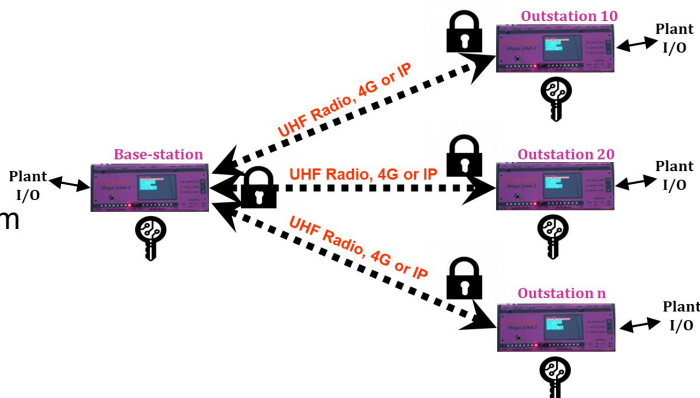

- Basestation and Outstation via Repeater Outstation system

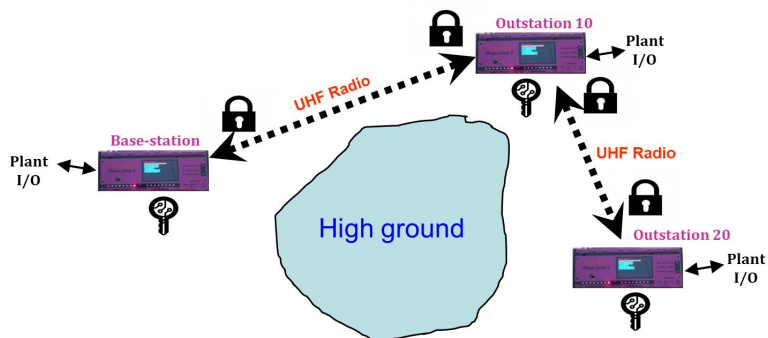

Churchill Controls Ltd

Unit 30 Wellington Business Park, Dukes Ride, Crowthorne, Berkshire, RG45 6LS

Tel: +44 (0)1344 750233 Fax: +44 (0)1344 752304

e-mail: [sales@churchill-controls.co.uk](mailto:sales@churchill-controls.co.uk)

## Product Options and Ordering Information

**Mega\_Link 2** can be ordered with a variety of power supply options and types of communication interface modules fitted in one or both of the COM1 and COM2 ports.

The base part number is 7800 and this is followed by a suffix of 4 characters to define installed options.

### Mega\_Link Expansion Modules and Accessories:

16-channel Digital Input Expansion Module	7850-1
16-channel Digital Output Expansion Module	7850-2
8-channel Analogue Input Expansion Module	7860-1
4-channel Analogue Output Expansion Module	7870-1
Aerials	Various, depending on application
Aerial downlead cable	Per metre
Aerial mounting poles, brackets and hardware	Various, depending on application
Surge and lightning protection units	Mains power, aerial and leased line

### Associated Support Services:

Radio path site survey	Price on application
Commissioning support	Price on application
Service visits, repairs and training	Price on application

## Specifications

Mechanical:	Size 150w x 125h x 110d, DIN rail mounting
Power Supply:	Mains: 100...250Vac, 50VA max (including 15WH battery back-up) 12Vdc: 6...15Vdc, 24W max 24Vdc: 20...30Vdc, 30W max
Electrical Connections:	Pluggable 2.5mm <sup>2</sup> screw terminals
Digital Inputs:	Two groups of 4, each from volt-free contact to common 0V return
Digital Outputs:	Two groups of 4 volt-free relay contacts, each to common return, rated 120Vac/0.3A, 24Vdc/1A
Analogue Inputs:	Two fully isolated inputs calibrated 0...20mA into 10Ω, 0.025% resolution, 0.1% accuracy. Regulated 12Vdc output for transducer excitement
Analogue Outputs:	Two outputs with common +12Vdc return, calibrated 0...20mA into 500Ω max, 0.025% resolution, 0.1% accuracy
COM1, COM2:	De-regulated radio: UHF 458MHz, 500mW, up to 15km, depending on topography and aerial system UHF 869MHz, 500mW, up to 8km, depending on topography and aerial system 4G LTE cellular radio modem (Quad band) Leased line V23 modem RS232 serial
COM3:	Configurable for RS232 or RS485 for fieldbus or external modem
COM4:	10/100M Ethernet for IP communications
COM5:	USB-A Host interface for logging to memory card or external modem
COM6:	Micro-USB Device interface for configuration & diagnostics using DCD2 software

### Churchill Controls Ltd

Unit 30 Wellington Business Park, Dukes Ride, Crowthorne, Berkshire, RG45 6LS

Tel: +44 (0)1344 750233 Fax: +44 (0)1344 752304

e-mail: [sales@churchill-controls.co.uk](mailto:sales@churchill-controls.co.uk)

Display:	320 x 240 colour TFT with adjacent joystick
System Capabilities:	No of outstations: 249 max per base-station No of repeaters: 8 max on any path
Fieldbus Protocols:	Modbus RTU Allen Bradley DF1 half duplex Mitsubishi Melsec FX and non-FX
Technical:	Processor: 32-bit ARM Cortex-M Clock Speed: 72MHz CPU Memory: 512KB Flash, 64KB RAM, 64KB NOVRAM Additional Memory: 256KB RAM, 1MB NOVRAM, 4GB Flash, 4GB SD Card

I/O Expansion Modules:	Module size: 57w x 125h x 110d, DIN rail mounting Max number: 32 Digital Input: 16 inputs, designed to interface from volt-free contacts. Digital Output: 16 outputs, volt-free relay contacts rated at 125Vac/1A, 60Vdc/1A. Analogue Input: 8 fully isolated inputs calibrated 0...20mA into 10Ω, 0.025% resolution, 0.1% accuracy Analogue Output: 4, fully isolated outputs calibrated 0...20mA into 500Ω max, 0.025% resolution, 0.1% accuracy
------------------------	---

- We also supply a full range of aerials, download cables, masts, poles and all associated mounting hardware
- Please contact Churchill Controls for a radio path survey service and advice during selection of aerial configurations for your application and installation sites

## Contact Us

**Churchill Controls** have a group of Agents and Distributors covering the whole of UK & Ireland; for further information and downloads, please visit our website or contact sales for any enquiries.

<http://www.churchill-controls.co.uk/>

Churchill Controls Ltd

Unit 30 Wellington Business Park, Dukes Ride, Crowthorne, Berkshire, RG45 6LS

Tel: +44 (0)1344 750233 Fax: +44 (0)1344 752304

e-mail: [sales@churchill-controls.co.uk](mailto:sales@churchill-controls.co.uk)

